

DIN 6527


Frezy trzpieniowe, 2-ostrzowe, długie, z promieniem na narożu, do obróbki form



End mills, 2-flute, with corner radius, for moulds

Radius Schaftfräser, Zweischneider, lang

Фрезы концевые, 2-х перьевые, с радиусом по углу, для обработки форм

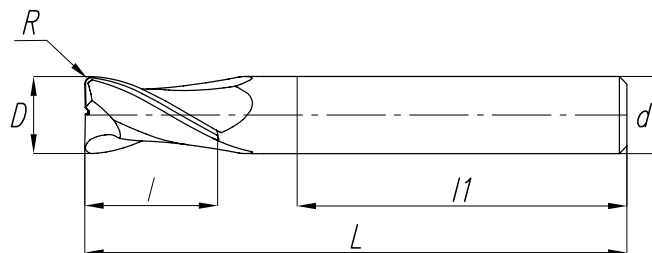

DIN 6527	Z=2		45 HRC		$\lambda=30^\circ$ $\gamma=8^\circ$	<table border="1"> <tr><td>1.1÷1.8</td></tr> <tr><td>3.1÷3.5</td></tr> <tr><td>6.1÷8.3</td></tr> </table>	1.1÷1.8	3.1÷3.5	6.1÷8.3		
1.1÷1.8											
3.1÷3.5											
6.1÷8.3											

D (h10)	d (h6)	L	l	l1	R	VHM	
						PVD	
						Code No 0641-554	
3	3	38	7	28	0,5	F502101	●
4	4	50	8	28	0,5	F502203	●
5	5	50	10	28	0,5	F502305	●
6	6	57	10	36	1	F502407	●
8	8	63	16	36	1,6	F502509	●
10	10	72	19	40	2	F502600	●
12	12	83	22	45	2	F502702	●
14	14	83	22	45	2	F502727	●
16	16	92	26	48	3	F502804	●
18	18	92	26	48	3	F502829	●
20	20	104	32	50	3	F502906	●