

DIN 6537



G

Wiertła kręte stopniowe pełnowęglkowe, dwuostrzowe,
do otworów pod gwinty metryczne

Step twist drills, solid carbide, 2-flutes, for standard metric thread

VHM Stufenbohrer für Gewindekernlochbohrungen

Свёрла твердосплавные комбинированные, 2-х перьевые,
для стандартной метрической резьбы

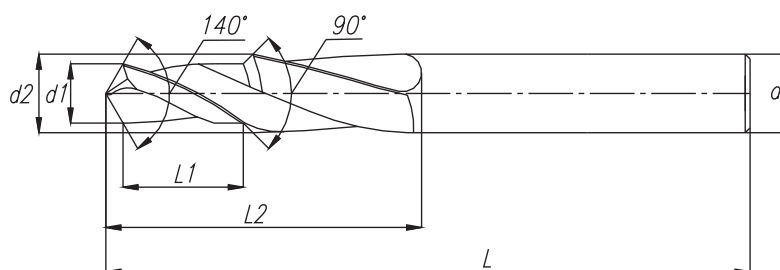

d1 (m7)	d2 (h8)	d	L	L1	L2	pod gwint suitable for geeignet für Соответственный для	VHM	
							PVD	Code No 0641-211
3,3	4,5	6	66	11,4	28	M4	N500100	●
4,2	6	6	66	13,7	28	M5	N500201	●
5	8	8	79	16,5	41	M6	N500303	●
6,8	10	10	89	21	47	M8	N500405	●
8,5	12	12	102	25,5	55	M10	N500507	●
10,2	14	14	107	30	60	M12	N500609	●
12	16	16	115	34,5	65	M14	N500700	●
14	18	18	123	38,5	73	M16	N500802	●