


DIN 373

Pogłębiacze walcowo-czołowe z pilotem stałym z chwytem walcowym

Countersinks with solid pilot plain shank

Flachsenker, Zylinderschaft, mit festem Führungzapfen

Зенковки торцевые с постоянным пилотом с цилиндрическим хвостовиком

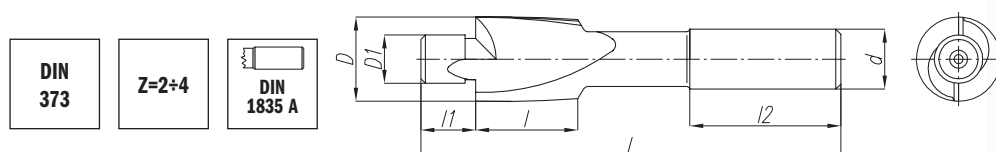

Form f – dokładna / fine / genau / точная

D (z9)	D1 (e8)	d (h9)	L	l	l1	l2	z	HSS	
								Code No 0641-262-	
4.3	2.2	4.3	56	10	2.2	-	2	010601	○
5	2.5	5	56	10	2.5	-	2	010703	○
5	2.7	5	56	10	2.7	-	2	010805	○
5.5	2.8	5	71	14	2.8	31.5	4	010907	○
6	3.2	5	71	14	3	31.5	4	011001	●
6.5	3.7	5	71	14	3.5	31.5	4	011103	○
8	4.3	5	71	14	4	31.5	4	011205	●
10	5.3	8	80	18	5	35.5	4	011307	●
11	6.4	8	80	18	6	35.5	4	011409	●
15	8.4	12.5	100	22	8	40	4	011500	●
18	10.5	12.5	100	22	10	40	4	011602	●
20	13	12.5	100	22	13	40	4	011704	●

Form m – średniodokładna / medium / genau durchschnittlich / средне точная

D (z9)	D1 (e8)	d (h9)	L	l	l1	l2	z	HSS	
								Code No 0641-262-	
4.3	2.4	4.3	56	10	2.4	-	2	015606	○
5	2.7	5	56	10	2.7	-	2	015708	○
5	2.9	5	56	10	3	-	2	015800	○
5.5	3	5	71	14	3	31.5	4	015901	○
6	3.4	5	71	14	3.5	31.5	4	016006	●
6.5	3.9	5	71	14	4	31.5	4	016108	○
8	4.5	5	71	14	4.5	31.5	4	016200	●
10	5.5	8	80	18	5.5	35.5	4	016301	●
11	6.6	8	80	18	6.5	35.5	4	016403	●
15	9	12.5	100	22	9	40	4	016505	●
18	11	12.5	100	22	11	40	4	016607	●
20	14	12.5	100	22	14	40	4	016709	●

Form n – zwykła / normal / normal / обыкновенная

D (z9)	D1 (e8)	d (h9)	L	l	l1	l2	M*	z	HSS	
									Code No 0641-262-	
4.3	1.6	4.3	56	10	2	-	M2	2	020601	○
5	1.9	5	56	10	2	-	M2,3	2	020703	○
5	2.05	5	56	10	2	-	M2,5	2	020805	○
5.5	2.1	5	71	14	2	31.5	M2,6	4	020907	○
6	2.5	5	71	14	2.5	31.5	M3	4	021001	●
6.5	2.9	5	71	14	3	31.5	M3,5	4	021103	●
8	3.3	5	71	14	3	31.5	M4	4	021205	●
10	4.2	8	80	18	4	35.5	M5	4	021307	●
11	5	8	80	18	5	35.5	M6	4	021409	●
15	6.8	12.5	100	22	6.5	40	M8	4	021500	●
18	8.5	12.5	100	22	8.5	40	M10	4	021602	●
20	10.2	12.5	100	22	10	40	M12	4	021704	●